

STERYLIS VS is a line of devices with an ozone generator with increased power, additionally using the UV-C technology in the disinfection process and two-stage air filtration.

Maximum recommended cubic capacity
rooms for **UV-C** disinfection

800 m³

Maximum recommended cubic capacity
rooms for **O₃** sterilization

1800 m³

WORK MODES:



Filtration



Disinfection UV-C



UV-C disinfection -
silent mode



Sterilization
O₃ + UV-C (Auto)



TECHNICAL SPECIFICATIONS:

STANDARD MODE – UV-C DISINFECTION

The maximum dose of UV-C radiation	305 J/m ²
Fan performance UV-C disinfection mode	800 m ³ /h
Noise level – disinfection mode UV-C	56 dB(A)

SILENT MODE – UV-C DISINFECTION


The maximum dose of UV-C radiation	394 J/m ²
Fan performance UV-C disinfection mode (silent)	620 m ³ /h
Noise level – disinfection mode UV-C (silent)	54 dB(A)

MODE – STERILIZATION O₃ + UV-C

Maximum cubic capacity of the sterilized room (to achieve 5 ppm O ₃)	1800 m ³
Ozone generator capacity	120 000 mg/h
Fan capacity Sterilization mode O ₃ +UV-C	1050 m ³ /h
Noise level – sterilization mode O ₃ +UV-C	58 dB(A)

FILTRATION MODE

Fan capacity in filter mode	800 m ³ /h
Noise level – filtering mode	56 dB(A)
UV lamp	YES

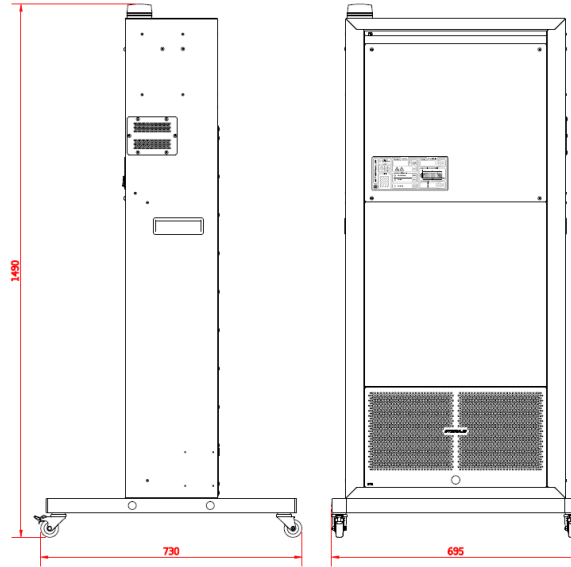

Type lamps UV	UV-C sterilization $\lambda = 253,7 \text{ nm}$
Total electrical power of UV-C sources	440 W
Durability of UV lamps	9000 h
Total radiant power of UV-C sources	157 W
Ozone generator	YES
Ozone concentration sensor	YES
Ozone destructor	YES
Air filtering	2-stage
Fan type	Radial
Fan engine	enclosed
Type	flowtype
Controller	YES
Automatic mode of operation	YES (control of sterilization time according to actual ozone concentration readings)
Self-diagnosis	YES
Working time counter	YES (signaling the replacement of filters and UV radiators)
Power supply	230 V (AC), 50 Hz
Rated current	9,6 A
Rated power	2210 W
Power cable length	3 m / 10 m*
Dimensions (H x W x D)	1490 x 695 x 730
Net weight	60 kg
Type of housing	metal, powder-coated
Transport wheels/handles	transport wheels signaling safe
Additional functions	and excessive ozone levels, detachable power cord

* - option available after consultation with the sales department

Due to the continuous development of our products, we reserve the right to make changes to the design of the devices and to update their parameters.

Revision Date : 04.01.2021